

**RPS** with meter counter - 30 m + **XB 300** - Multi-Set

Cable roller system - stowed in RUNPOTEC system case

Item no.: 10224



Description: XB 300 see Page 2  
 Description: RP5 see Page 3

**DATA**

ITEM NO.:	<b>10224</b>
DIMENSION	L 437 mm x W 405 mm x H 137 mm
WEIGHT	5,19 kg
DIMENSION Ø	XB 300 - 300 mm Multifunction mandrel: Ø 430 mm
LOAD CAPACITY XB 300	300 kg
TOTAL BREAKING LOAD RP5	270 kg
EAN-CODE	9120045476552

**DESCRIPTION**

The multifunction mandrel has been specially developed for XB 300, XB 500 and XB 500 T cable rolling systems. Loose cable bundles can also be rolled by attaching them to the stainless-steel center mandrel and then folding out the 4 side brackets. The telescopic center mandrel measures 72 mm in diameter. It is therefore also ideal for rolling a thinner cable bundle with a small inner diameter or individual wires. The normal height of the multifunction mandrel is 196 mm, which can be extended up to max. 294 mm via the telescopic mechanism. This means high cable bundles or corresponding tube bundles can also be rolled. When the 4 side brackets are unfolded, there is a total contact surface of 430 mm in diameter. Ideally, this should correspond to the respective cable or tube bundle. A designated opening allows the unit to be combined with the RUNPOSTICKS.

Optimum area of application: : **XB300**: Rolling of (damaged) drums up to 300 kg as well as loose cable bundles or individual wires up to a max. height of 294 mm and a max. diameter of 430 mm, **RP5**: for pipe dimension 16 mm – 40 mm

**Application video:** a short, very informative application video can be viewed by scanning the QR code or on [www.RUNPOTEC.com](http://www.RUNPOTEC.com).

**Scope of supply:** 1 x XB 300, 1 x Multifunction mandrel, 1 x RP5 with digital meter counter - 30 m, 1 x RUNPOTEC system case

**Detailed image:**

**Advantages RP5:**  
Very narrow  
bending radius

Detailed info  
see page 3



**Application images:**  
XB 300 with cable + drum

**ADVANTAGES**

- XB 300 Cable Roller
- Universal cable drum rewinder and unwinder
- Compact - lightweight
- Loadable up to 300 kg
- Excellent for damaged cable drums
- No cable clutter
- Non-slip and stable base

**Multifunction mandrel**

- Can be used in combination with XB 300, XB 500 and XB 500 T
- Allows loose cable bundles and individual wires to be rolled
- Telescopic centre mandrel, extendable up to 294 mm this allows high cable bundles or corresponding tube bundles to be accommodated

**RP5 Cable pulling system**

- Integrated digital meter counter
- 50 % less friction resistance
- 270 kg total breaking load
- Almost breakproof
- 2 x RG7 - guiding head with swivel Ø 7 mm
- Glide back protection (only stops the RG7 guiding head)

**XB 300** Cable Roller

Loadable up to 300 kg

Item no.: 10137



VIDEO

KG
300
↓
↓

XB Mandrel  
Ø 45 mm  
removable for  
small drums

XB 300
Click here
Video

Possible applications

With clip system for the RM35 digital cable length measuring device

**DATA**

ITEM NO.:	10137
DIMENSION	H 100 x Ø 290 mm
DIAMETER Ø	300 mm
LOAD BEARING CAPACITY	300 kg
DRUM WIDTH	variable
WEIGHT	1,26 kg
HEIGHT	105 mm
MANDREL Ø MM	15 mm / 45 mm
EAN-CODE	9120045475623

**DESCRIPTION**

The compact XB 300 Cable roller is a universal cable winder/unwinder for all small to medium cable reels. The XB 300 Cable roller impresses with its small, light and flat design, but can still be loaded up to 300 kg.

**Especially suitable for damaged cable drums.**

It enables trouble-free and rational working without tangled cables. 6 rubberized feet ensure a non-slip and stable base. Optimal for protecting surfaces for already finished floor coverings. Due to the removable mandrel, cable drums with different hole sizes can be used.

**Application video:** a short, very informative application video can be viewed by scanning the QR code or on [www.RUNPOTEC.com](http://www.RUNPOTEC.com).

**Scope of supply:** 1 x XB 300 Cable roller incl. XB mandrel

**ADVANTAGES**

- Universal cable drum rewinder and unwinder
- For all types of cables and cable drums even with very small inner diameters
- Compact - lightweight - 1.26 kg net weight
- Loadable up to 300 kg
- Excellent for damaged cable drums
- No cable clutter
- Trouble-free and rational work approach
- Non-slip and stable base

**INFORMATION**

Available as spare part

**Multifunction mandrel**

Item no.: 20696

Click here  
Produktinformation

Alternative cable roller

**XB 500 Cable Roller**

Item no.: 10136

Click here  
Produktinformation

**RUNPOSTICKS RED**

Item no.: 20881

Click here  
Produktinformation

**RPS** RUNPOTEC Polyester Ø 5,5 mm – incl. digital meter counter

optimal for pipe inner diameter 9 - 32 mm

Item no.: 10202 | 10203



▶ **VIDEO**  
  
**RPS**  
Click here  
Video

KG **270**

PATENTED


Click here  
Productinformation



- Integrated digital meter counter – m/ft
- Beginning: RG7 - Guiding head incl. swivel Ø 7 mm
- Glide back protection
- Active (Only stops RG7 Guiding head)
- Triple twisted special polyester fish tape Ø 5,5 mm
- Ending: RG7 - Guiding head incl. swivel Ø 7 mm, pressed onto strand

Rod	Rec. pipe-ID Ø	Bending radius	Total breaking load incl. RG7 - RUNPOGLIDER
Ø			
5,5 mm	9 – 32 mm	15 mm	270 kg

Very narrow bending radius

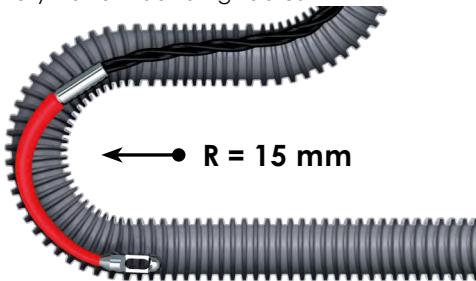


**R = 15 mm**

Virtually break-free even with tightest radii



**R**

50 % less friction resistance

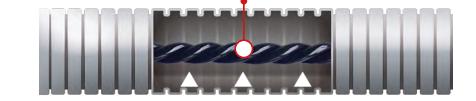

Only punctual contact

Total breaking load 270 kg

Strand + Pressing + Guiding head + Eyelet



**KG 270**

**DATA**

ITEM NO.	10202	10203
LENGTH	20 m	30 m
WEIGHT	1,34 kg	1,65 kg
EAN-CODE	9120045477573	9120045477580
DIMENSION BOX	L 380 X W 310 X H 50 mm	
TOTAL BREAKING LOAD	270 kg (on the whole strap)	
ROD Ø	Ø 5,5 mm	
MATERIAL	triple twisted special polyester fish tape	
BENDING RADIUS	15 mm	
PIPE INNER Ø	optimally from 9 mm - 32 mm	

**DESCRIPTION**

The RP5 - RUNPOTEC Polyester Ø 5.5 mm is a cable pulling tool with digital meter counter. The triple-twisted special plastic tape with a diameter of 5.5 mm has an even better shearing effect than the 3 mm fiberglass rod; the frictional resistance is only half the normal value due to spot contact. The patented RG7 guiding head with swivel Ø 5.5 mm (pressed at the beginning and end of the tape) allows overcoming tight radii (bending radius 15 mm). The RP5 Ø 5.5 mm is stored in a jobsite suitable box incl. glide back protection (only stops the RG7 Guiding head). The unit of measurement of the metre counter can be changed from metric (m) to imperial (ft). The total breaking load of 270 kg refers to the entire pulling system. The cable pulling system is virtually breakage-free. The RP5 replacement strap cannot be stored in the box.

**Optimal field of application:** for pipe inner diameter Ø 9 mm - 32 mm.

**Scope of supply:** 1 x RP5 RUNPOTEC Polyester Ø 5,5 mm with digital meter counter in a plastic box, including 2 x RG7 RUNPOGLEITER with swivel (pressed on both sides)

**ADVANTAGES**

- Integrated digital meter counter
- Total breaking load 270 kg
- 2 x RG7 - Guiding head with swivel Ø 7 mm
- Glide back protection (only stops the RG7 Guiding head)
- Triple twisted special plastic tape Ø 5,5 mm
- 50 % less frictional resistance
- Virtually break-free, even with the tightest radii

**INFORMATION**

Compatible accessories:

**RP5 Replacement fish tape**

20 m – Item no.: 20240

30 m – Item no.: 20241



Click here  
Productinformation

**Cable pulling loop** with hook (Quick release fastener) – **set of 4**

Item no.: 10159



Click here  
Productinformation