RP5 with meter counter 30 m **+ Cable pulling loop** *with hook Set*
for pipes from 14 mm inner diameter and non-guided lines
Item no.: **11153**

RUNPOTEC®
STRONGEST CABLE PULLING TOOLS

VIDEO
RP5
Click here Video

VIDEO
Cable pulling loop
Click here Video

Click here Product information

Application Cable pulling loop

Virtually break-free even with tightest radii

← ● → **R**

Total breakting load 270 kg

Strand + Pressing + Guiding head + Eyelet

KG 270

DATA

ITEM NO.	**11153**
LENGTH	30 m
WEIGHT	1,605 kg
DIMENSION MM	L 380 mm x B 310 mm x H 50 mm
MATERIAL ROD	Triple twisted special plastic fish tape
Ø ROD	5,5 mm
BENDING RADIUS	15 mm
TOTAL BREAKING LOAD	270 kg (whole tape)
PIPE INNER Ø	optimal from 16 mm - 32 mm
EAN-CODE	9120045476651

ADVANTAGES

- Total breaking load 270 kg
- Incl. digital meter counter
- Triple twisted special plastic tape Ø 5,5 mm
- 2 x RG7 - Guiding head with swivel Ø 7 mm
- Glide back protection (only stops the RG7 guiding head)
- 50 % less frictional resistance
- Protects connectors from damage
- Thanks to quick-release hooks compatible to all RUNPOTEC products with RG - Guiding head (RUNPOGLEITER)

DESCRIPTION

„The RP5 - RUNPOTEC Polyester Ø 5.5 mm is a cable pulling tool with digital meter counter. (For determining the length of pipes/cables or for creating cable lists.) The triple-twisted special plastic tape with a diameter of 5.5 mm has an even better shearing effect than the 3 mm fiberglass rod; the frictional resistance is only half the normal value due to spot contact. The patented RG7 guiding head with swivel Ø 5.5 mm (pressed at the beginning and end of the tape) allows overcoming tight radii (bending radius 15 mm). The RP5 - RUNPOTEC Polyester Ø 5.5 mm is stored in a jobsite suitable and robust storage box with an ergonomic carrying handle. It is equipped with the new glide back protection (only stops the RG7 guiding head), which prevents the cable pulling strap from slipping back accidentally. The unit of measurement of the metre counter can be changed from metric (m) to imperial (ft). The incredible total breaking load of 270 kg refers to the entire pulling system. Labour- and time-consuming repair work is no longer necessary, as this cable pulling system is virtually breakage-free.

Optimal field of application: for pipe inner diameter 9 - 32 mm
Scope of supply: 1 x RP5 cable pulling tool Ø 5,5 mm with digital meter counter in a plastic box, length: 30 m, including 2 x RG7 RUNPOGLEITER with swivel (pressed on both sides), Cable pulling loop with hook set of 4: 1 x protective cap outer Ø 14 mm, 1 x protective cap outer Ø 17 mm, 1 x protective cap outer Ø 23 mm, 1 x protective cap outer Ø 30 mm

INFORMATION

Compatible accessories:
RP5 Replacement tape
20 m – Item no.: 20240
30 m – Item no.: 20241
40 m – Item no.: 20242

Click here Product information

Cable pulling grip with quick-release fastener
Ø 4 - 6 mm – Item no.: 20272
Ø 6 - 9 mm – Item no.: 20273
Ø 9 - 15 mm – Item no.: 20274

Click here Product information

Cable pulling loop - *with hook (quick connection)*

Set of 4 - with protective cap and flexible loop
Item no.: **10159**

RUNPOTEC®
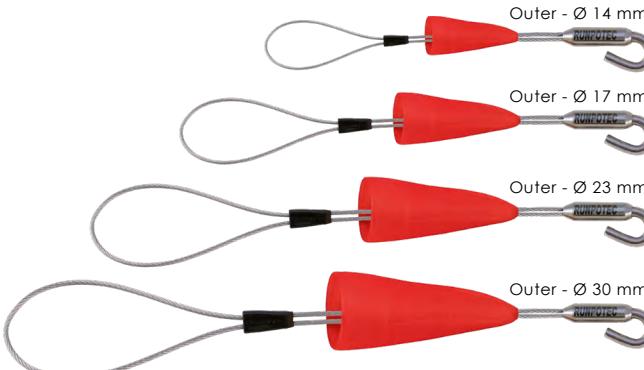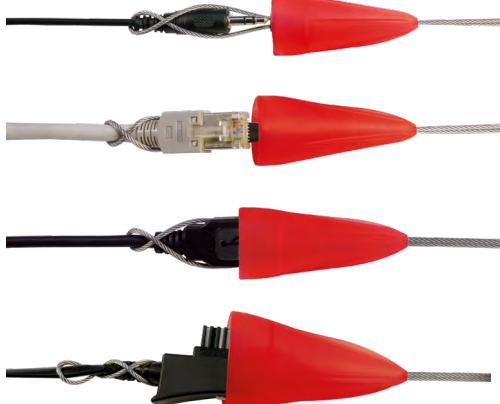STRONGEST CABLE PULLING TOOLS

VIDEO

Cable pulling loop

Click here Video

Outer - Ø 14 mm

Outer - Ø 17 mm

Outer - Ø 23 mm

Outer - Ø 30 mm

Click here Productinformation

STAINLESS STEEL

Application images

DATA

ITEM NO.	10159
PROTECTIVE CAPS INNER Ø MM	12 mm | 15 mm | 20 mm | 27 mm
PROTECTIVE CAPS OUTER Ø MM	14 mm | 17 mm | 23 mm | 30 mm
FOR PIPE Ø MM	20 mm | 25 mm | 32 mm | 40 mm
TOTAL WEIGHT KG	0,05 kg
LENGTH	195 mm
LOOP	can be adjusted flexibly
ROPE DIAMETER	1,5 mm | Stainless steel
PROTECTIVE CAP MATERIAL	Special plastic
EAN-CODE	9120045475821

ADVANTAGES

- Quick attachment to the loop
- Protects plugs against damage
- Tensile load transfer to the cable, not to the connector
- Flexible stainless steel loop
- Pulling in of preassembled cable with plug possible
- Thanks to quick-release hooks compatible to all RUNPOTEC products with RG7 RUNPOGLIDER

DESCRIPTION

Cable pulling loop with hook (quick connection) with protective cap and flexible made of stainless steel with Ø 1.5 mm. Easy attachment of cables to the loop. Plugs are protected by the tensile load on the cable. The protective cap allows cables with plugs to be pulled through pipes or other situations while protecting the plug. The hook makes it possible to fasten cable pulling loops to all products with RG7 RUNPOGLIDER. (RP5, RP1, etc.) Also ideal for fixing or pulling several cables together.

Optimal area of application: From 14 mm inner diameter and non-routed cables.
Application video: you can watch a short, very informative application video by scanning the QR code or on www.runpotec.com.
Scope of delivery: 4 x Cable pulling loop with hook - with protective cap and flexible loop

INFORMATION

Cable pulling loop with RTG 6 | Set of 4
Item no. 10154

Click here Productinformation

Cable pulling loop with RTG 6 | Individually
Item no. 20624 | 20625 | 20626 | 20627

Click here Productinformation

Cable pulling loop with hook | Individually
Item no. 20628 | 20629 | 20630 | 20631

Click here Productinformation